

# High-Speed Balanced Photoreceiver




Features

- **Bandwidth DC to 200 MHz**
- **Common-Mode Rejection Ratio (CMRR) 45 dB typ.**
- **Si-PIN detectors, 0.8 mm active diameter**
- **Spectral range 320 – 1000 nm**
- **Very low NEP, down to 6.5 pW/√Hz**
- **Transimpedance gain switchable  $10 \times 10^3$  V/A,  $30 \times 10^3$  V/A**
- **High dynamic input range up to  $2 \times 10$  mW balanced optical power**
- **Fast monitor outputs with 10 MHz bandwidth and  $1 \times 10^3$  V/A gain**
- **Switchable low pass filter for minimizing wideband noise**
- **Free-space input 1.035"-40 threaded, easily convertible to fiber optic input (FC and FSMA) with optionally available screw-on adapters**
- **UNC 8-32 and M4 tapped holes for mounting on standard posts with metric and imperial thread**

Applications



- **Spectroscopy**
- **Heterodyne detection**
- **Optical coherence tomography (OCT)**
- **Optical delay measurement**
- **Differential optical front-end for oscilloscopes, spectrum analyzers, A/D converters and RF lock-in amplifiers**

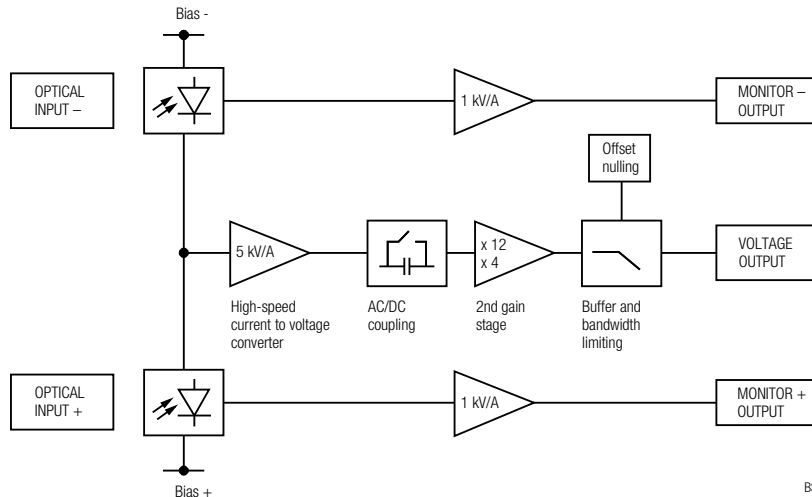Block Diagram





BS-HBPR\_R2

## High-Speed Balanced Photoreceiver

<p>Intended Use</p>	<p>The HBPR-200M-30K-SI-FST photoreceiver consists of a combination of two anti-parallel connected photodiodes with a subsequent low-noise transimpedance amplifier. It is designed for fast conversion of the tiny difference of two optical signals into an equivalent output voltage. Operation is mostly self-explanatory. If in doubt, consult this document or contact support@femto.de.</p> <p>For safe operation, please refer to the damage thresholds specified in the "Absolute Maximum Ratings", "Temperature Range" and "Power Supply" sections of this document.</p> <p>The operating environment must be free of smoke, dust, grease, oil, condensing moisture, and other contaminants that could affect the operation or performance.</p>
<p>Application Notes</p>	<p>The damage threshold of 12 mW for each photodiode mentioned in the "Absolute Maximum Ratings" section applies to reasonably homogeneous illumination of the photodiodes. Extreme focusing of the light beam can lead to damage to the photodiodes, even at significantly lower light power.</p> <p>To achieve optimum performance, it is recommended that the CW light intensity at both inputs be well balanced. The monitor outputs can be used for continuous balance control. For setups with arbitrarily varying CW offset, the photoreceiver's AC mode can be helpful. Using AC mode increases the CW offset range to 850 μW (@ 850 nm), regardless of the gain setting.</p>
<p>Available Version</p>	<p>HBPR-200M-30K-SI-FST</p>  <p>1.035"-40 threaded flanges with internally threaded coupler rings mounted (outer dia. 30 mm), for free space applications, compatible with many optical standard accessories</p> <p>Optional: fiber adapters PRA-FC, PRA-FCA, PRA-FSMA</p> 
<p>Related Models</p> <p>Si Versions</p>	<p>Various free space or fiber coupled HBPR models, with bandwidth up to 500 MHz, in the spectral range from 320 nm to 1700 nm are available.</p> <p>Fiber-coupled with fix/permanent FC fiber connectors</p> <p>HBPR-100M-60K-SI-FC      Si-PIN Ø 0.8 mm, DC – 100 MHz, 320 – 1000 nm, CMRR 50 dB, gain <math>2.0 \times 10^4 / 6.0 \times 10^4</math> V/A switchable</p> <p>HBPR-200M-30K-SI-FC      Si-PIN Ø 0.8 mm, DC – 200 MHz, 320 – 1000 nm, CMRR 45 dB, gain <math>1.0 \times 10^4 / 3.0 \times 10^4</math> V/A switchable</p> <p>HBPR-500M-10K-SI-FC      Si-PIN Ø 0.4 mm, DC – 500 MHz, 320 – 1000 nm, CMRR 40 dB, gain <math>5.0 \times 10^3 / 10.0 \times 10^3</math> V/A switchable</p> <p>Free space versions with 1.035"-40 threaded flanges</p> <p>HBPR-100M-60K-SI-FST      Si-PIN Ø 0.8 mm, DC – 100 MHz, 320 – 1000 nm, CMRR 50 dB, gain <math>2.0 \times 10^4 / 6.0 \times 10^4</math> V/A switchable</p> <p>HBPR-500M-10K-SI-FST      Si-PIN Ø 0.4 mm, DC – 500 MHz, 320 – 1000 nm, CMRR 40 dB, gain <math>5.0 \times 10^3 / 10.0 \times 10^3</math> V/A switchable</p>

## High-Speed Balanced Photoreceiver


<p>Related Models (continued)</p> <p>InGaAs Versions</p>	<p>Fiber-coupled with fix/permanent FC fiber connectors (ball lense coupled)</p> <p>HBPR-100M-60K-IN-FC      InGaAs-PIN <math>\varnothing</math> 0.08 mm, DC – 100 MHz, 900 – 1700 nm, CMRR 55 dB, gain <math>2.0 \times 10^4 / 6.0 \times 10^4</math> V/A switchable</p> <p>HBPR-200M-30K-IN-FC      InGaAs-PIN <math>\varnothing</math> 0.08 mm, DC – 200 MHz, 900 – 1700 nm, CMRR 50 dB, gain <math>1.0 \times 10^4 / 3.0 \times 10^4</math> V/A switchable</p> <p>HBPR-500M-10K-IN-FC      InGaAs-PIN <math>\varnothing</math> 0.08 mm, DC – 500 MHz, 900 – 1700 nm, CMRR 45 dB, gain <math>5.0 \times 10^3 / 10.0 \times 10^3</math> V/A switchable</p> <p>Free space versions with 1.035"-40 threaded flanges</p> <p>HBPR-100M-60K-IN-FST      InGaAs-PIN <math>\varnothing</math> 0.3 mm, DC – 100 MHz, 800 – 1700 nm, CMRR 50 dB, gain <math>2.0 \times 10^4 / 6.0 \times 10^4</math> V/A switchable</p> <p>HBPR-200M-30K-IN-FST      InGaAs-PIN <math>\varnothing</math> 0.3 mm, DC – 200 MHz, 800 – 1700 nm, CMRR 45 dB, gain <math>1.0 \times 10^4 / 3.0 \times 10^4</math> V/A switchable</p> <p>HBPR-450M-10K-IN-FST      InGaAs-PIN <math>\varnothing</math> 0.3 mm, DC – 450 MHz, 800 – 1700 nm, CMRR 35 dB, gain <math>5.0 \times 10^3 / 10.0 \times 10^3</math> V/A switchable</p>	
<p>Available Accessories</p>	<p>PRA-FC PRA-FCA PRA-FSMA</p>  <p>PS-15-25-L</p> 	<p>Fiber-adaptor with external 1.035"-40 thread</p> <p>Power Supply Input: 100 – 240 VAC Output: <math>\pm 15</math> VDC</p>
<p>Specifications</p>	<p>Test conditions      <math>V_s = \pm 15</math> V, <math>T_A = 25</math> °C, output load impedance 50 <math>\Omega</math>, warm-up 20 minutes (min. 10 minutes recommended), monitor outputs terminated with 1 M<math>\Omega</math></p> <p>Gain</p> <p>Transimpedance gain      <math>10 \times 10^3</math> V/A (@ 2<sup>nd</sup> gain <math>\times 2</math>, 50 <math>\Omega</math> load) <math>30 \times 10^3</math> V/A (@ 2<sup>nd</sup> gain <math>\times 6</math>, 50 <math>\Omega</math> load)</p> <p>Gain accuracy      <math>\pm 1</math> % electrical</p> <p>Conversion gain      <math>5.4 \times 10^3</math> V/W typ. (@ 2<sup>nd</sup> gain <math>\times 2</math>, 850 nm, 50 <math>\Omega</math> load) <math>16.2 \times 10^3</math> V/W typ. (@ 2<sup>nd</sup> gain <math>\times 6</math>, 850 nm, 50 <math>\Omega</math> load)</p> <p>Common mode rejection ratio (CMRR)      50 dB typ. (<math>f \leq 100</math> MHz) 45 dB typ. (<math>f \leq 200</math> MHz)</p> <p>Frequency Response</p> <p>Lower cut-off frequency      DC / 10 Hz, switchable</p> <p>Upper cut-off frequency (–3 dB)      200 MHz / 20 MHz, switchable</p> <p>Time Response</p> <p>Rise/fall time (10 % – 90 %)      1.75 ns (@ 2<sup>nd</sup> gain <math>\times 2</math>); 1.85 ns (@ 2<sup>nd</sup> gain <math>\times 6</math>) 17.5 ns (@ bandwidth set to 20 MHz)</p> <p>Input</p> <p>Noise equivalent power (NEP)      minimum 7.8 pW/<math>\sqrt{\text{Hz}}</math> (@ 850 nm) 8.8 pW/<math>\sqrt{\text{Hz}}</math> (@ 850 nm, 20 MHz) 19.0 pW/<math>\sqrt{\text{Hz}}</math> (@ 850 nm, 100 MHz) 33.0 pW/<math>\sqrt{\text{Hz}}</math> (@ 850 nm, 200 MHz)</p> <p>Maximum differential CW power (for linear amplification)      185 <math>\mu\text{W}</math> (@ 2<sup>nd</sup> gain <math>\times 2</math>, DC-coupled, 850 nm) 62 <math>\mu\text{W}</math> (@ 2<sup>nd</sup> gain <math>\times 6</math>, DC-coupled, 850 nm) 850 <math>\mu\text{W}</math> (@ AC-coupled, 850 nm)</p> <p>Max. optical CW balanced power (common mode power)      10 mW (on each photodiode, @ 850 nm)</p> <p>Monitor optical saturation power      12 mW (@ 850 nm) (limited by maximum ratings)</p>	

## High-Speed Balanced Photoreceiver

Specifications (continued)		
Detector	Detector type Active area Spectral range Sensitivity	Si-PIN photodiode Ø 800 µm 320 – 1000 nm 0.54 A/W typ. (@ 850 nm)
Output	Output voltage range  Max. output voltage Offset voltage compensation Output impedance Slew rate Max. output current Output reflection S22  Output noise (typ.)	±1.0 V (@ 50 Ω load) for linear operation and low harmonic distortion ±2.0 V (@ 50 Ω load) ±100 mV typ., adjustable by offset potentiometer 50 Ω (terminate with 50 Ω load) 2800 V/µs 70 mA -30 dB @ < 100 MHz -20 dB @ < 800 MHz  2.0 mV RMS (13 mV peak-peak) (@ 2 <sup>nd</sup> gain ×2) 5.5 mV RMS (36 mV peak-peak) (@ 2 <sup>nd</sup> gain ×6) 0.3 mV RMS (2.0 mV peak-peak) (@ 2 <sup>nd</sup> gain ×2, BW 20 MHz) 0.8 mV RMS (5.3 mV peak-peak) (@ 2 <sup>nd</sup> gain ×6, BW 20 MHz) (@ 50 Ω load, no signal on detectors, measurement bandwidth 2 GHz)
Monitor Outputs	Gain Voltage range Output impedance Max. output current Bandwidth Output noise	1 × 10 <sup>3</sup> V/A (@ ≥ 100 kΩ load) 0 ... +10 V (@ ≥ 100 kΩ load) 50 Ω (terminate with ≥ 100 kΩ load) 30 mA typ. DC – 10 MHz 0.6 mV RMS (4 mV peak-peak) (@ 100 kΩ load, no signal on detectors, measurement bandwidth 200 MHz)
Power Supply	Supply voltage Supply current	±15 V (±14.5 V ... ±16.5 V) -90 / +120 mA typ. (depends on operating conditions, recommended power supply capability min. ±200 mA)
Optical Input Connector	Material FST flange Material FST coupler ring	1.4305 stainless steel, nickel-plated 1.4305 stainless steel, glass bead blasted
Case	Weight Material	410 g (0.9 lbs) including coupler rings AlMg3Mn, nickel-plated
Temperature Range	Storage temperature Operating temperature	-40 °C ... +85 °C 0 °C ... +60 °C

Absolute Maximum Ratings	Optical input power (CW) Power supply voltage	12 mW (on each photodiode) ±20 V
--------------------------	--	-------------------------------------

Connectors	Inputs  Outputs  Power supply	1.035"-40 threaded flanges for free space applications and for use with various types of optical standard accessories  SMA jacks (female)  LEMO® series 1S, 3-pin fixed socket (mating plug type: FFA.1S.303.CLAC52)
------------	---	--

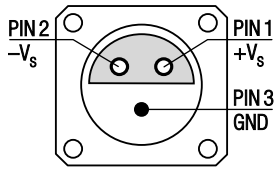

PIN 1  
+V<sub>s</sub>

PIN 2  
-V<sub>s</sub>


PIN 3  
GND

Pin 1: +15 V  
Pin 2: -15 V  
Pin 3: GND

### High-Speed Balanced Photoreceiver

Scope of Delivery	HBPR-200M-30K-SI-FST, 2 × threaded coupler ring, Lemo® 3-pin connector, 3 × adapter SMA (male) to BNC (female), datasheet	
Ordering Information	HBPR-200M-30K-SI-FST	1.035"-40 threaded flanges for free space applications and for use with various types of optical standard accessories

Spectral Response HBPR-200M-30K-SI-FST

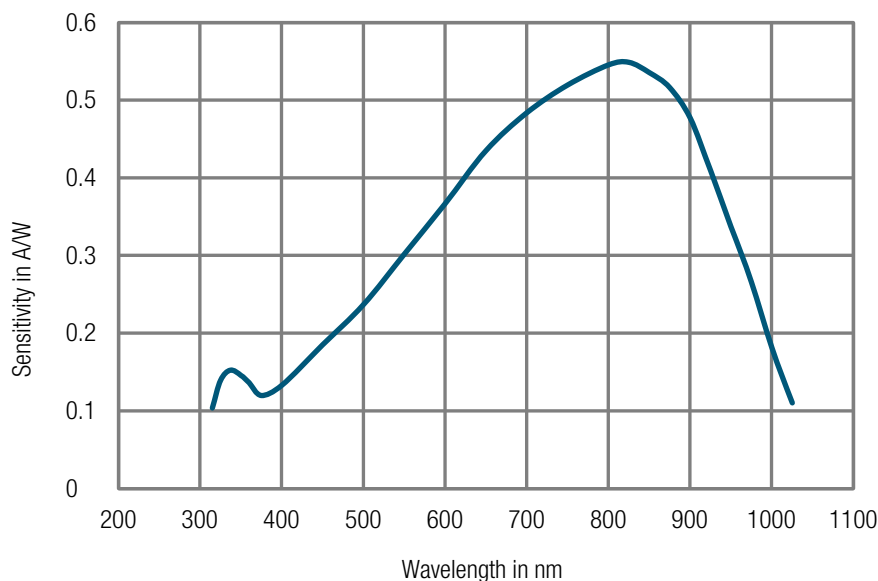


DB-Sens-HBPR-100-200-SI\_R2

High-Speed Balanced Photoreceiver

Dimensions

HBPR-200M-30K-SI-FST

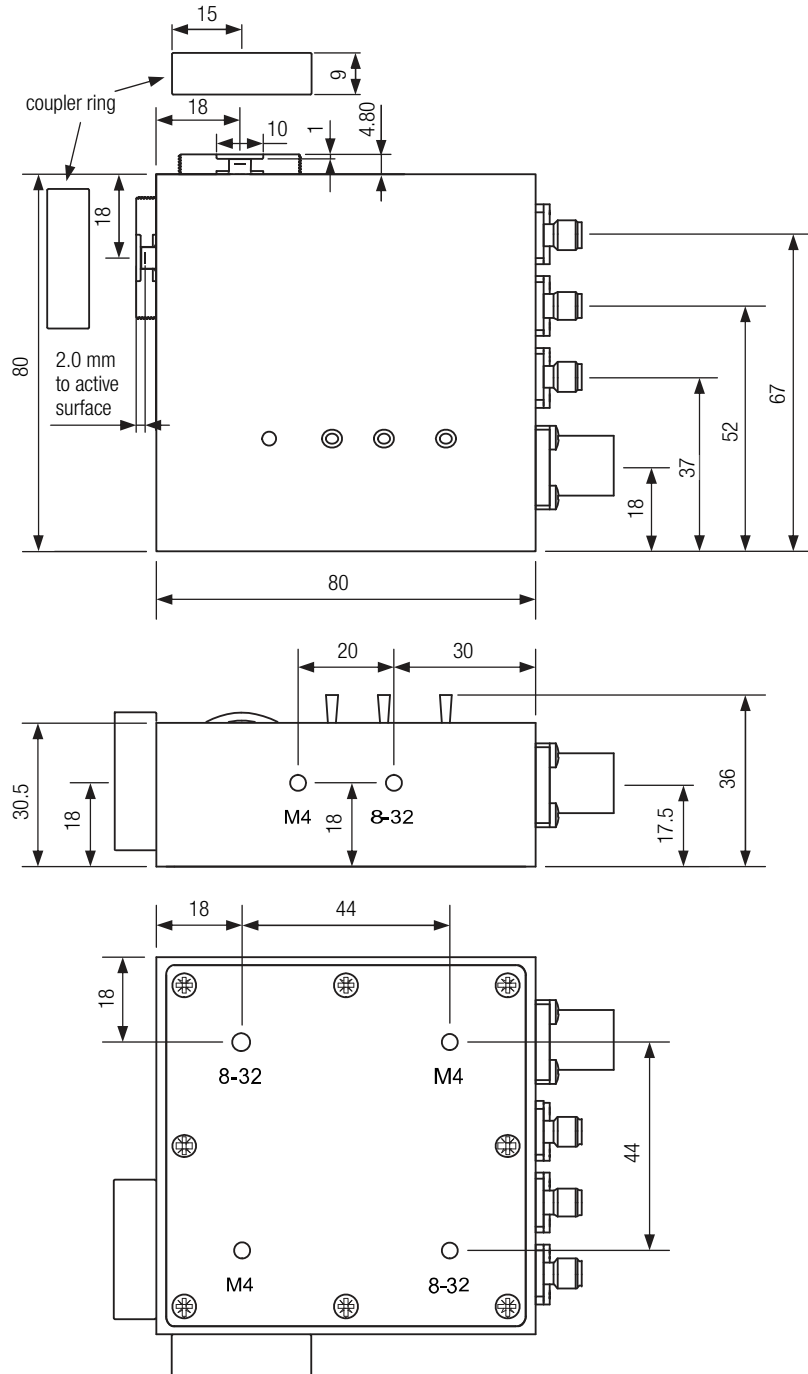

DZ-HBPR\_FST\_R2

all dimensions in mm unless otherwise noted

The bottom plate may be rotated to match the appropriate mounting thread to the optical axis by unscrewing the 8 screws.

FEMTO Messtechnik GmbH  
 Klosterstr. 64  
 10179 Berlin · Germany  
 Phone: +49 30 280 4711-0  
 Fax: +49 30 280 4711-11  
 Email: info@femto.de  
 www.femto.de

Specifications are subject to change without notice. Information provided herein is believed to be accurate and reliable. However, no responsibility is assumed by FEMTO Messtechnik GmbH for its use, nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of FEMTO Messtechnik GmbH. Product names mentioned may also be trademarks used here for identification purposes only.

© by FEMTO Messtechnik GmbH · Printed in Germany